


REPLACING A MYRESERVE



Follow the process to replace a MyReserve unit

- Before removing a MyReserve ensure you update the Energy Manager with the latest available firmware.
- This is required to allow the data of the old MyReserve to be removed and the replacement unit information to be updated.
- Ensure that the Energy Manager is updated to the latest firmware. My Reserve Component's can only be removed from firmware version 5.17.0.0
- DO NOT install the new MyReserve prior to removing the existing components.

- Turn OFF the MyReserve AC & DC.
- Once you have done this, there will be three components appearing in red, these need to be removed from the system.
- There will a “-” sign to the far right of the screen.
- To remove these items click on the “-” sign for each.

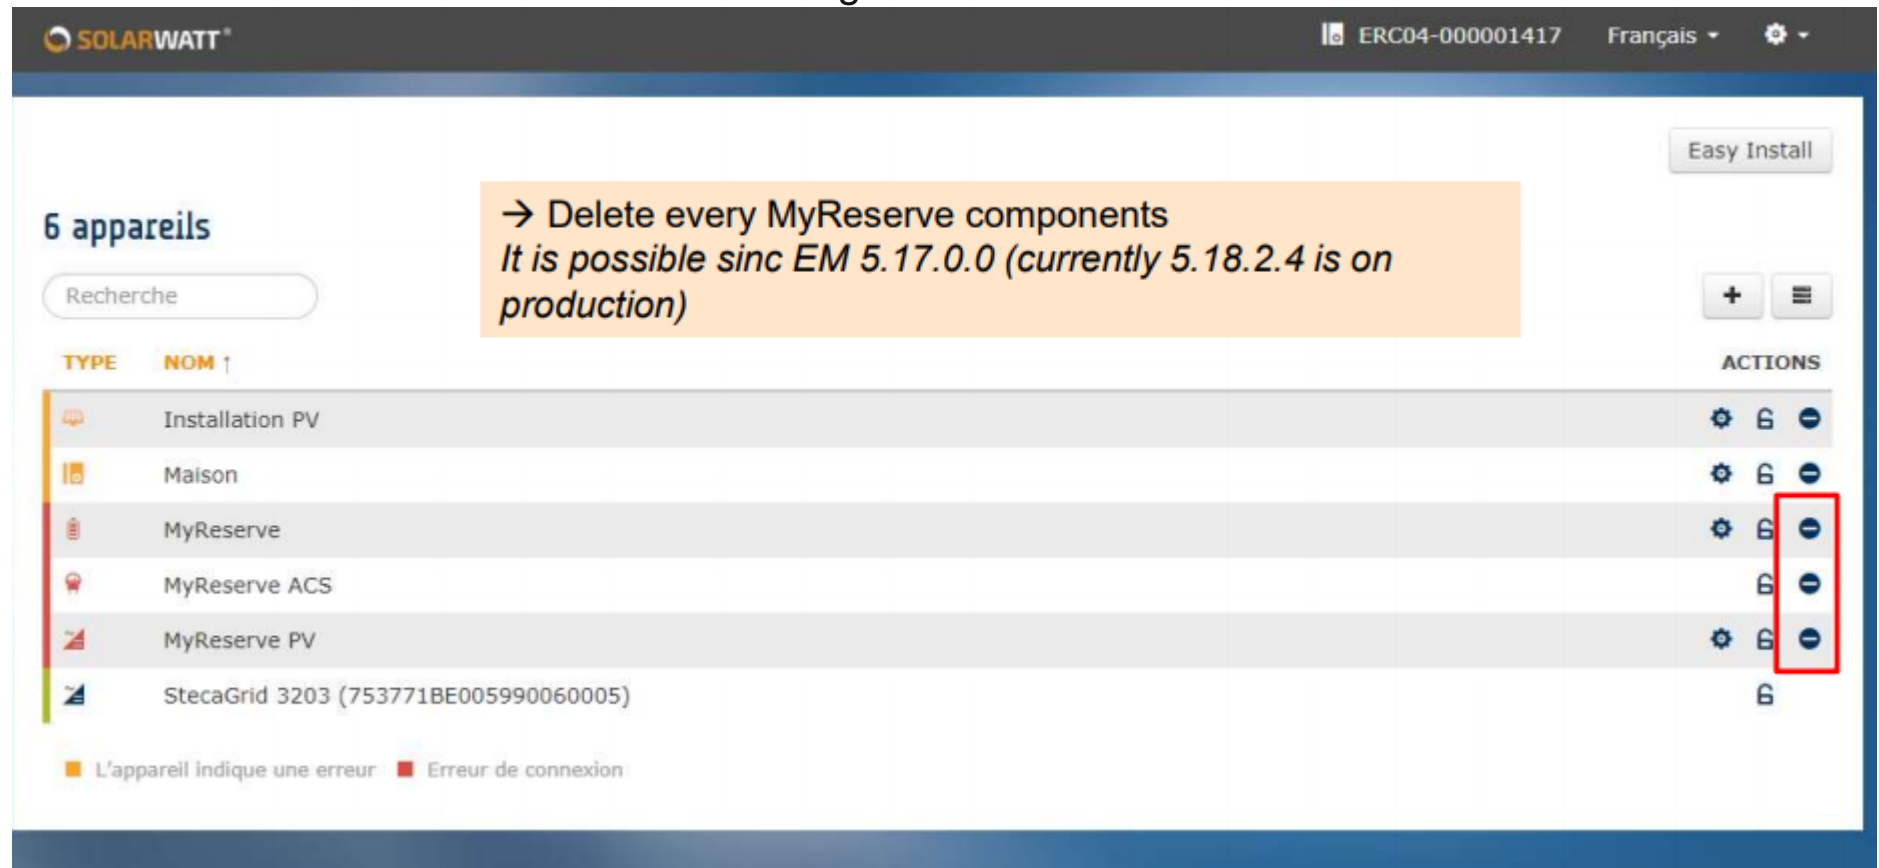






















ERC04-000001417 Français



Easy Install

6 appareils

Recherche

→ Delete every MyReserve components
It is possible sinc EM 5.17.0.0 (currently 5.18.2.4 is on production)

TYPE	NOM ↑	ACTIONS
	Installation PV	  
	Maison	  
	MyReserve	  
	MyReserve ACS	 
	MyReserve PV	  
	StecaGrid 3203 (753771BE005990060005)	

 L'appareil indique une erreur  Erreur de connexion











- Once the components have been removed, remove the faulty MyReserve.
- Install the replacement MyReserve and following the start-up procedures power up the MyReserve.
- Click on Easy Install once the components have been found.
 - a. Configure the inverter into the new My Reserve PV
 - b. Set the new My Reserve PV as inverter into the PV Plant
 - c. Set the location in the My Reserve configuration. My Reserve ACS should be the main meter. My Reserve should be set as battery on house side.



L'appareil **MyReserve PV** a été désinstallé avec succès

3 appareils

Recherche

TYPE	NOM ↓	ACTIONS
	Installation PV	  
	Maison	  
	StecaGrid 3203 (753771BE005990060005)	

■ L'appareil indique une erreur ■ Erreur de connexion

→ Easy Install
→ Configure the inverter into the new MyReservePV
→ Set the new MyReservePV as inverter into the PV plant
→ Set in the location the MyReserveACS as main meter, MyReserve as battery on house side...

Easy Install

FOR ANY QUESTIONS OR FEEDBACK PLEASE CONTACT 1300 SOLWAT